

Load Leveling Slings

Model CSS – Chain Sling Saddle Rings


PRODUCT FEATURES:

- Allows unbalanced loads to be lifted evenly.
- Allows full adjustment of sling length.
- Rated for up to Grade 100 Chain.
- Can use many different chain lengths with only one chain sling saddle ring.
- Can be used with various chain sling end fittings.
- Economical and easy to use.

Double Leg (DL)



Shown with optional chain sling.

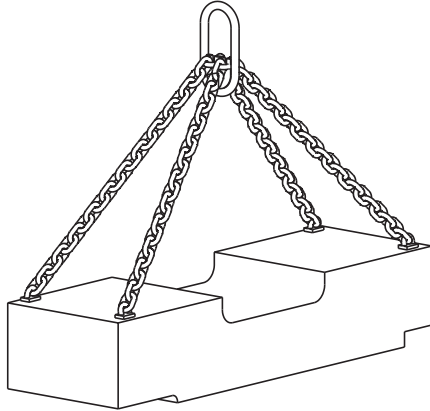

Quadruple Leg Shown

INSTOCK PROGRAM

How to order:

Double Leg - CSS-9/32 DL
 Quadruple Leg - CSS-9/32 QL

Quadruple Leg (QL)




Shown with optional chain sling.

SPECIFICATIONS - Grade 100 Chain

Model Number	Chain Size (inches)	Overall Ring Height (inches)	Capacity (lbs.) For Grade 100 Chain								Weight (lbs.)	
			Single Leg	Double Leg Loading			Quadruple Leg Loading					
			90°	60°	45°	30°	60°	60°	45°	45°	30°	30°
CSS-9/32	9/32	6	4300	7400	6100	4300	11200	9100	6450	2	4	
CSS-3/8	3/8	7.50	8800	15200	12400	8800	22800	18600	13200	4	8	
CSS-1/2	1/2	10	15000	26000	21200	15000	39000	31800	22500	9	11	

SPECIFICATIONS - Grade 80 Chain

Model Number	Chain Size (inches)	Overall Ring Height (inches)	Capacity (lbs.) For Grade 80 Chain								Weight (lbs.)	
			Single Leg	Double Leg Loading			Quadruple Leg Loading					
			90°	60°	45°	30°	60°	60°	45°	45°	30°	30°
CSS-9/32	9/32	6	3500	6100	4900	3500	9100	7400	5200	2	4	
CSS-3/8	3/8	7.50	7100	12300	10000	7100	18400	15100	10600	4	8	
CSS-1/2	1/2	10	12000	20800	17000	12000	31200	25500	18000	9	11	

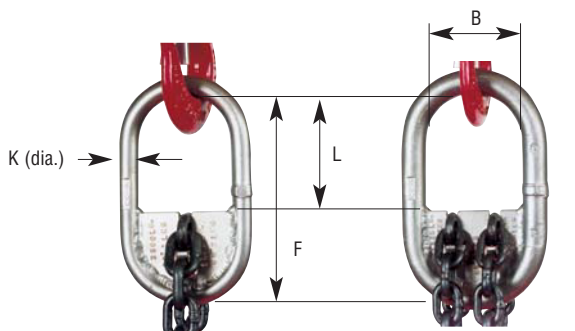

DOUBLE LEG (DL)

QUADRUPLE LEG (QL)

Patent No. 4,241,575

SPECIFICATIONS

Model Number	Style	Dimensions (in.)			
		B	F	K	L
CSS-9/32	DL	2-5/8	5-5/8	37/64	3
	QL	3-1/8	6-3/4	13/16	3-3/4
CSS-3/8	DL	3	6-3/4	13/16	3-1/2
	QL	4	9-1/4	1-1/8	5-9/32
CSS-1/2	DL	4	9-1/4	1-1/8	4-1/2
	QL	4	9-1/8	1-1/4	4-1/2

WARNING
 Do not exceed rated capacities.